

PRESSURE REDUCING VALVES



Pressure Reducing Valve



Angle Safety Valve



Safety Valve



Flow Control Valve

• Direct Acting Valves • Pilot Operated Valves • Safety Valves • Float Valves • Balancing Valves

Direct Activated PRESSURE REDUCING VALVE with Internal balancing line for STEAM

Body, Bonnet and Trims:	Stainless Steel
Size Range:	1/2" to 6" (15mm to 150mm)
Temperature:	Up to 170°C (340°F)
Max. Inlet Pressure:	12 Kg /cm ² (170 PSI)
Pressure Adjusting Range:	1-6 Kg /cm ² & 4-10 Kg /cm ²
Seal:	Viton
Applications:	Steam
Ends:	Screwed(BSP/NPT) & Flanged


Model: 4MIBP



Direct Activated PRESSURE REDUCING VALVE with Internal balancing line for WATER / GAS / AIR

Body, Bonnet and Trims:	Stainless Steel
Size Range:	1/2" to 6" (15mm to 150mm)
Temperature:	Up to 85°C (185°F)
Max. Inlet Pressure:	18 Kg /cm ² (250 PSI)
Pressure Adjusting Range:	1-6 Kg /cm ² & 4-10 Kg /cm ²
Seal:	NBR
Applications:	Water, Gas, Air & Oil
Ends:	Screwed(BSP/NPT) & Flanged

Model : 4MWGF / 4MWGS

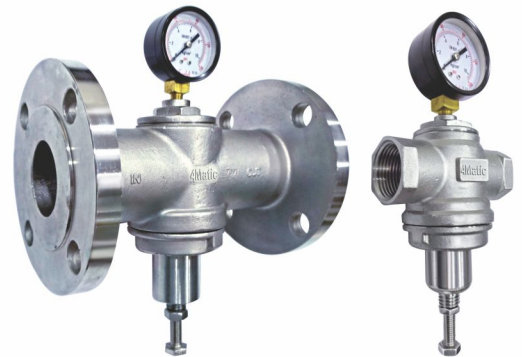

Direct Activated Cast Iron PRESSURE REDUCING VALVE with Internal balancing line for WATER / GAS / AIR FLANGED 150#

Body:	Cast Iron
Bonnet and Trims:	Stainless Steel
Size Range:	1" to 4" (25mm to 100mm)
Temperature:	Up to 85°C (185°F)
Max. Inlet Pressure:	18 Kg /cm ² (250 PSI)
Pressure Adjusting Range:	1-6 Kg /cm ² & 4-10 Kg /cm ²
Seal:	NBR
Applications:	Water, Gas, Air & Oil
Ends:	Flanged

Model : 4MWGC



Note: Also available in WCB Body

Direct Activated PRESSURE REDUCING VALVE with Internal balancing line SEMI PILOT Diaphragm Operated (With Strainer)

Body and Trims:	Stainless Steel
Bonnet:	Aluminum
Size Range:	1/2" to 2.1/2" (15mm to 65mm)
Temperature:	Up to 85°C (185°F)
Max. Inlet Pressure:	12 Kg /cm ² (170 PSI)
Pressure Adjusting Range:	1-6 Kg /cm ² & 4-10 Kg /cm ²
Seal:	NBR
Applications:	Water, Gas, Air & Oil
Ends:	Screwed(BSP/NPT) & Flanged

Model : 4MSDS/4MSDF



PRESSURE REDUCING VALVES

Direct Activated GUN METAL PRESSURE REDUCING VALVE with Strainer

Body and Trims:	Gun Metal
Bonnet:	Aluminum
Size Range:	1/2" to 2.1/2" (15mm to 65mm)
Temperature:	Up to 85°C (185°F)
Max. Inlet Pressure:	12 Kg /cm ² (170 PSI)
Pressure Adjusting Range:	1-5 Kg /cm ² & 4-10 Kg /cm ²
Seal:	NBR
Applications:	Water, Gas & Air
Ends:	Screwed(BSP/NPT)

Model: 4MSBP



Micro PRESSURE REDUCING VALVE for Low Pressure applications

Body, Bonnet and Trims:	Stainless Steel
Size Range:	1/2" to 2" (15mm to 50mm)
Temperature:	Up to 70°C (160°F)
Max. Inlet Pressure:	0.5 Kg /cm ² (10 PSI)
Pressure Adjusting Range:	0.01 mmwc to 1.10mmwc (100 mmwc to 1000mmwc)
Seal:	NBR
Applications:	Gas
Ends:	Screwed(BSP/NPT) & Flanged

Model: 4MMPS /4MMPF



Direct Activated Aluminum Body PRESSURE REDUCING VALVE with internal balancing line for Air with Panel mounting

Body:	Aluminum
Bonnet and Trims:	Stainless Steel
Size Range:	1/2" to 1" (15mm to 25mm)
Temperature:	Up to 85°C (185°F)
Max. Inlet Pressure:	10 Kg /cm ² (150 PSI)
Pressure Adjusting Range:	0.5-9 Kg /cm ²
Seal:	NBR
Applications:	Air
Ends:	Screwed(BSP/NPT)

Model : 4MALP



Direct Activated CAST IRON PRESSURE REDUCING VALVE with internal balancing line for Oil & Steam

Body:	Cast Iron
Bonnet and Trims:	Stainless Steel
Size Range:	1" to 4" (25mm to 100mm)
Temperature:	Up to 170°C (340°F)
Max. Inlet Pressure:	10 Kg /cm ² (150 PSI)
Pressure Adjusting Range:	1-6 Kg /cm ² & 4-10 Kg /cm ²
Seal:	Viton
Applications:	Oil & Steam
Ends:	Flanged

Model : 4MOCP-CI



Direct Activated Stainless Steel Body PRESSURE REDUCING VALVE with internal balancing line for Oil & Steam

Body, Bonnet and Trims:	Stainless Steel
Size Range:	½" to 4" (15mm to 100mm)
Temperature:	Up to 170°C (340°F)
Max. Inlet Pressure:	10 Kg /cm ² (150 PSI)
Pressure Adjusting Range:	1-6 Kg /cm ² & 4-10 Kg /cm ²
Seal:	Viton
Applications:	Oil & Steam
Ends:	Screwed(BSP/NPT) & Flanged


Model : 4MOCS / 4MOCF



Direct Activated PRESSURE REDUCING VALVE with internal balancing line for Water / Gas / Air / Oil for High Pressure Up to 28 Kg /cm²

Body, Bonnet and Trims:	Stainless Steel
Size Range:	½" to 4" (15mm to 100mm)
Temperature:	Up to 85°C (185°F)
Max. Inlet Pressure:	28 Kg /cm ² (400 PSI)
Pressure Adjusting Range:	12-25 Kg /cm ²
Seal:	NBR
Applications:	Water, Gas, Air & Oil
Ends:	Screwed(BSP/NPT) & Flanged

Model : 4MPMF / 4MPMS

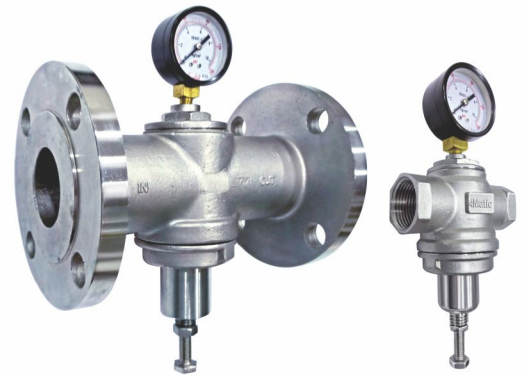

Direct Activated PRESSURE REDUCING VALVE with internal balancing line only for Water / Gas / Air for Up to 40 Kg /cm²

Body, Bonnet and Trims:	Stainless Steel
Size Range:	½" to 4" (15mm to 100mm)
Temperature:	Up to 85°C (185°F)
Max. Inlet Pressure:	40 Kg /cm ² (570 PSI)
Pressure Adjusting Range:	20-35 Kg /cm ²
Seal:	NBR
Applications:	Water, Gas, Air
Ends:	Screwed(BSP/NPT) & Flanged

Model : 4MPHS / 4MPHF



Direct Activated PRESSURE REDUCING VALVE with internal balancing line for Water / Gas / Air for Low Pressure

Body, Bonnet and Trims:	Stainless Steel
Size Range:	½" to 4" (15mm to 100mm)
Temperature:	Up to 85°C (185°F)
Max. Inlet Pressure:	2 Kg /cm ² (30 PSI)
Pressure Adjusting Range:	0.2-1.5 Kg /cm ²
Seal:	NBR
Applications:	Water, Gas, Air
Ends:	Screwed(BSP/NPT) & Flanged

Model : 4MLOF / 4MLOS



Note: Also available in High Temperature Up to 160°C (320°F) for Steam line

PRESSURE REDUCING VALVES

MULTI FUNCTION PRESSURE REDUCING VALVE with internal balancing line - Pilot operated

Body, Bonnet and Trims:	Stainless Steel
Size Range:	1.1/2" to 4" (40mm to 100mm)
Temperature:	Up to 85°C (185°F)
Max. Inlet Pressure:	12 Kg /cm ² (170 PSI)
Pressure Adjusting Range:	1-6 Kg /cm ² & 4-10 Kg /cm ²
Seal:	NBR
Applications:	Water, Gas, Air & Oil
Ends:	Screwed(BSP/NPT)

Note: Also available in High Temperature Up to 180° C (360°F) for Steam Line

Model : 4MBFRS



MULTI FUNCTION PRESSURE REDUCING VALVE with internal balancing line / basic (contact with sales for more details)

Body, Bonnet and Trims:	Stainless Steel
Size Range:	1.1/2" to 4" (40mm to 100mm)
Temperature:	Up to 85°C (185°F)
Max. Inlet Pressure:	12 Kg /cm ² (170 PSI)
Pressure Adjusting Range:	1-6 Kg /cm ² & 4-10 Kg /cm ²
Seal:	NBR
Applications:	Water, Gas, Air & Oil
Ends:	Screwed (BSP/NPT)

Model : 4MBFGS




Direct Activated "SILENT" PRESSURE RELIEF VALVE (SAFETY VALVE)

Body and Trims:	Stainless Steel
Size Range:	1/2" to 4" (15mm to 100mm)
Temperature:	Up to 80°C (180°F)
Pressure Adjusting Range:	0.5-10 Kg /cm ² , 10-20 Kg /cm ² & 25-35Kg /cm ²
Seal:	NBR
Applications:	Air, Water, Oil, Gas
Ends:	Screwed (BSP / NPT) & Flanged

Note: Direct Activated Pressure Sustaining Back Pressure Valve available on request

Model : 4MPLF / 4MPLS

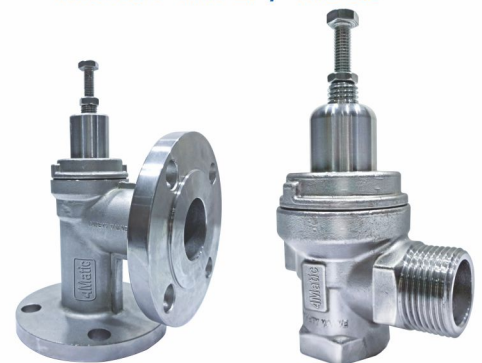

Direct Activated "SILENT" PRESSURE RELIEF VALVE (SAFETY VALVE) Variable Connection Type

Body and Trims:	Stainless Steel			
Model	4MPLS		4MPLF	
Size Range in Inches:	1/2" x 3/4"	1" x 1.1/2"	1" x 1.1/2"	1" x 2"
	1" x 2"		1.1/2" x 2"	2" x 3"
Temperature:	Up to 80°C (180°F)			
Pressure Adjusting Range:	0.5-10 Kg /cm ² , 10-20 Kg /cm ² & 25-35Kg /cm ²			
Seal:	NBR			
Applications:	Air, Water, Oil, Gas			
Ends:	Screwed(BSP/NPT) & Flanged			

Note: Direct Activated Pressure Sustaining Back Pressure Valve available on request


Model : 4MPLS / 4MPLF



Direct Activated "SILENT" PRESSURE RELIEF VALVE (SAFETY VALVE) for steam applications.

Body and Trims:	Stainless Steel
Size Range:	½" to 4" (15mm to 100mm)
Temperature:	Up to 170°C (340°F)
Pressure Adjusting Range:	0.5-10 Kg /cm ² , 10-20 Kg /cm ² & 25-35 Kg /cm ²
Seal:	Viton
Applications:	Water, Oil, Gas & Steam (High temperature)
Ends:	Screwed(BSP/NPT) & Flanged
Note: Direct Activated Pressure Sustaining Back Pressure Valve available on request	


Model : 4MPRS / 4MPRF

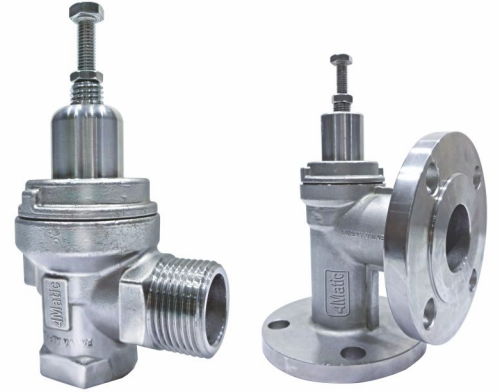

Direct Activated "SILENT" PRESSURE RELIEF VALVE (SAFETY VALVE) Variable Connection Type

Body and Trims:	Stainless Steel			
Model	4MPRS		4MPRF	
Size Range in Inches:	1/2" x 1"	1" x 1.1/2"	1" x 1.1/2"	1" x 2"
	1" x 2"		1.1/2" x 2"	2" x 3"
Temperature:	Up to 170°C (340°F)			
Pressure Adjusting Range:	0.5-10 Kg /cm ² , 10-20 Kg /cm ² & 25-35 Kg /cm ²			
Seal:	Viton			
Applications:	Water, Oil, Gas & Steam (High temperature)			
Ends:	Screwed(BSP/NPT) & Flanged			
Note: Direct Activated Pressure Sustaining Back Pressure Valve available on request				

Model : 4MPLF / 4MPRS

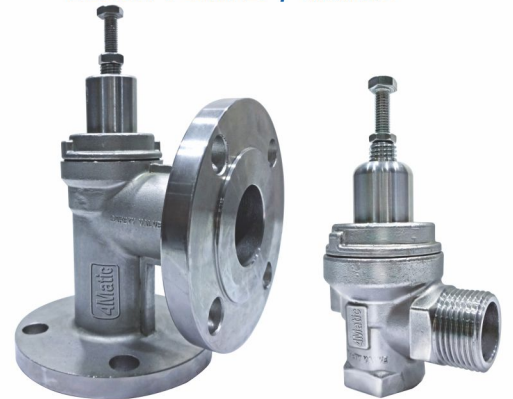

Direct Activated "SILENT" PRESSURE RELIEF VALVE (SAFETY VALVE)

Body and Trims:	Cast Iron
Size Range:	1" to 4" (25mm to 100mm)
Temperature:	Up to 85°C (185°F)
Pressure Adjusting Range:	0-10 Kg /cm ²
Seal:	NBR
Applications:	Water, Oil, Air & Gas
Ends:	Flanged

Note: Also available in WCB Body and Temperature Up to 160°C (320°F) for Steam applications.

Model : 4MCSE



FLOAT Valve - Full Flow Design

Body and Trims:	Stainless Steel
Size Range:	½" to 6" (15mm to 150mm)
Temperature:	Up to 85°C (185°F)
Pressure Range:	12 Kg
Max. Inlet Pressure:	12 Kg /cm ² (170 PSI)
Applications:	Water
Ends:	Screwed(BSP/NPT) & Flanged

Model : 4MFVT



PRESSURE REDUCING VALVES

Spring Loaded SAFETY VALVE Metal Seated Reduce bore Design

Body :	WCB / CF8 / CF8M
Trims :	CF8 / CF8M
Size Range :	½" to 14" (15mm to 350mm)
Temperature :	Up to 350°C (650°F)
Max. Inlet Pressure :	Up to 40 Kg / cm ² (569 PSI)
Pressure adjusting range :	0.5-6 Kg / cm ² ; 6 to 12 Kg / cm ² ; 10 to 16 Kg / cm ² 16 to 25 Kg / cm ² ; 25 to 35 Kg / cm ² ; 35 to 45 Kg / cm ²
Seal :	Metal Seat
Ends :	Flanged / Screwed (BSP / NPT)
Application :	Thermic Fluid / Steam

Model : 4MPTF / 4MPTS



Pilot operated Multifunctional Pressure reducing Valve - High Flow Design

Body :	CI/WCB / CF8 / CF8M
Trims :	CF8 / CF8M
Size Range :	1.½" to 24" (40mm to 600mm)
Temperature :	Up to 85°C (185°F)
Max. Inlet Pressure :	Up to 12Kg / cm ² (170 PSI)
Pressure adjusting range :	1-6 Kg / cm ² & 4 to 10Kg / cm ²
Seal :	NBR / EPDM / VITON
Ends :	Flanged
Application :	Water / Oil / Gas

Model : 4MDUF



PILOT OPERATED PRESSURE REDUCING VALVE

Body :	CI / WCB / CF8 / CF8M
Trims :	CF8 / CF8M
Size Range :	1.½" to 24" (40mm to 600mm)
Temperature :	Up to 85°C (185°F)
Max. Inlet Pressure :	Up to 12 Kg / cm ² (170 PSI)
Pressure adjusting range :	1-6 Kg / cm ² & 4 to 10 Kg / cm ²
Seal :	NBR / EPDM / VITON
Ends :	Flanged
Application :	Water / Oil / Gas

Model : 4MBOM



Direct Activated Balancing Valve

Body :	CI/WCB/CF8/CF8M/Gun Metal
Trims :	CF8/CF8M/Gun Metal
Size Range :	1" to 24" (25mm to 600mm)
Temperature :	Up to 85°C (185°F)
Max. Inlet Pressure :	Up to 12 Kg / cm ² (171 PSI)
Pressure adjusting range :	1-6 Kg / cm ² & 4 to 10 Kg / cm ²
Seal :	NBR / EPDM / VITON
Ends :	Flanged / Screwed (BSP / NPT)
Application :	Water / Oil / Gas

Model : 4MMOB



PRESSURE REDUCING VALVES



Micro PRV
(0.01 mmwc to 1.10 mmwc)
(1000 mmwc to 1000 mmwc)



Float Valve



High Flow PRV



Balancing Valve

4Matic
Industrial Valves and Valve Automation

Aira 4Matic Global Valve Automation

USA OPERATIONS

176 Detroit St Unit 1
Cary IL 60013 USA

O : 1 773 856 3555
F : 1 773 856 3550
info@4maticvalvesusa.com

INDIA OPERATIONS

Plot No.174 Shiv Shakti Estate
Near V-Trans Narol Road
Ahmedabad-382405 Gujarat India. info@4maticvalves.com

O : +91 7929 00632
C : +91 97272 53319 / 00543

SINGAPORE OPERATIONS

5 Soon Lee Street
#03-39 Pioneer Point
Singapore 627607

C : +65 9354 0060
P : +65 6909 3588
info@4maticvalves.com

PHILIPPINES OPERATIONS

511 Poblador Street Barangay
Hagdabato Libis
Mandaluyong City Philippines

O : + 63 954-2008
F : + 63 954-2805
info@4maticvalves.com



www.pilotprv.com